

# AQUABION®

## Galvanic Water Treatment

### Without chemicals or external power supply




## Technical sheet

### AQUABION® AB-S15



Pressure drop at type AB-S15

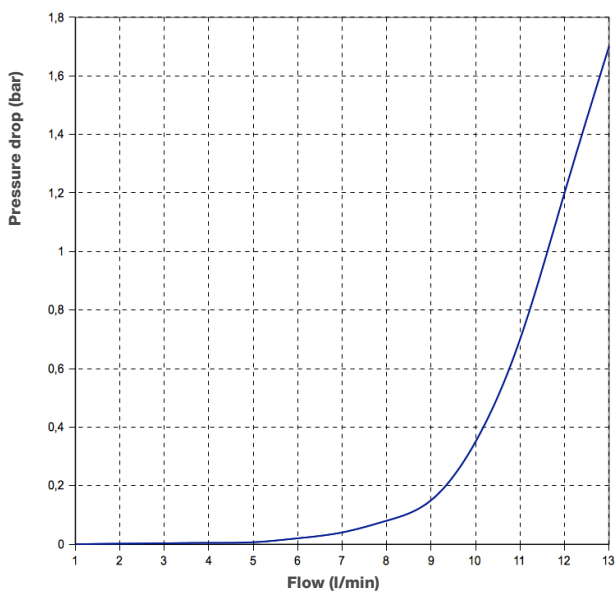

#### Internal diameter

1/2" DN15

Connection

male

Length

120 mm

Body diameter

30 mm

Weight

0,436 kg

Maximum pressure

16 bar

Nominal flow at 2m/s

0,40 m³/h

Pressure drop at nominal flow

0,02 bar

#### Material

#### Body

CW510L

#### Thread

CW510L

Internal parts

Zinc anode

Zn2 DIN EN 1179

Swirling body

1.4301

Sealing ring

PTFE

Construction

The body of the device consists of a single sleeve with two threaded nipples

Temperatures of use

Warm water:

- stored

85°C

- circulating

85°C

**IMPORTANT:** AQUABION® must be installed in metal or plastic piping with metal piping before and after AQUABION® and with equipotential bonding.

